




BasorFil BF2R H2''



BasorFil BF2R H4''


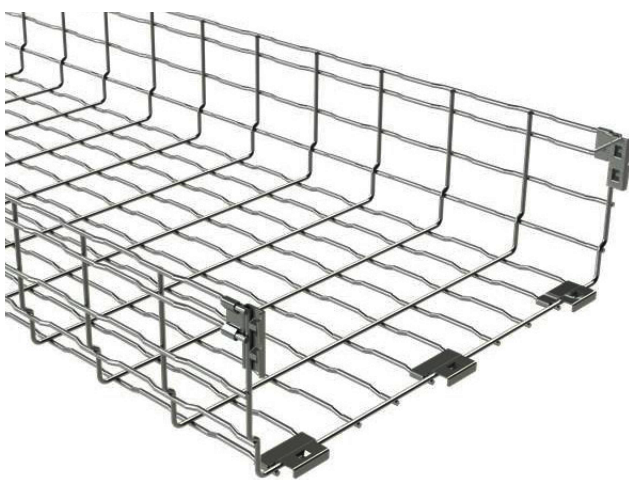


BasorFil BF2R H6''

SAFE WORKING LOAD DATA SHEET




BASORFIL WIRE MESH		SWL (Safe Working Load) NEMA VE1:				ROD Ø (INCH)	BASKET WEIGHT LB/FT
REF.	DESCRIPTION	SWL 5 FT SPAN (LB/FT)	SWL 6 FT SPAN (LB/FT)	SWL 7 FT SPAN (LB/FT)	SWL 8 FT SPAN (LB/FT)		
207389	BF2R 2"x 2" EZ	8.48	5.85	4.45	3.29	0.154	0.510
207248	BF2R 4"x 2" EZ	19.22	13.26	10.07	7.46	0.154	0.540
207249	BF2R 6"x 2" EZ	21.47	14.81	11.25	8.33	0.154	0.570
207250	BF2R 8"x 2" EZ	32.21	22.22	16.87	12.5	0.154	0.740
207251	BF2R 12"x 2" EZ	38.61	26.64	20.23	14.98	0.154	1.070
207394	BF2R 16"x 2" EZ	47.27	32.61	24.77	18.34	0.154	1.360
209989	BF2R 18"x 2" EZ	45.19	31.18	23.68	17.54	0.154	1.690
207395	BF2R 20"x 2" EZ	42.94	29.63	22.5	16.66	0.181	1.800
207396	BF2R 24"x 2" EZ	53.68	37.03	28.12	20.83	0.181	2.110
207914	BF2R 4"x 4" EZ	32.55	22.46	17.05	12.63	0.154	0.740
207397	BF2R 8"x 4" EZ	48.83	33.69	25.58	18.95	0.154	1.070
207398	BF2R 12"x 4" EZ	51.43	35.48	26.94	19.96	0.154	1.360
207399	BF2R 16"x 4" EZ	75.15	51.85	39.37	29.16	0.181	1.830
209990	BF2R 18"x 4" EZ	74.11	51.13	38.83	28.76	0.181	1.970
207400	BF2R 20"x 4" EZ	72.9	50.29	38.19	28.29	0.181	2.100
207401	BF2R 24"x 4" EZ	79.48	54.83	41.64	30.84	0.181	2.380
226814	BF2R 8"x 6" EZ	71.69	49.46	37.56	27.82	0.169	1.365
226815	BF2R 12"x 6" EZ	107.36	74.07	56.24	41.66	0.181	1.838
226816	BF2R 16"x 6" EZ	107.7	74.3	56.43	41.8	0.181	2.116
226817	BF2R 18"x 6" EZ	113.07	78.01	59.24	43.88	0.193	2.609
226818	BF2R 20"x 6" EZ	119.65	82.55	62.69	46.43	0.193	2.764
226805	BF2R 24"x 6" EZ	132.1	91.14	69.21	51.26	0.193	3.123

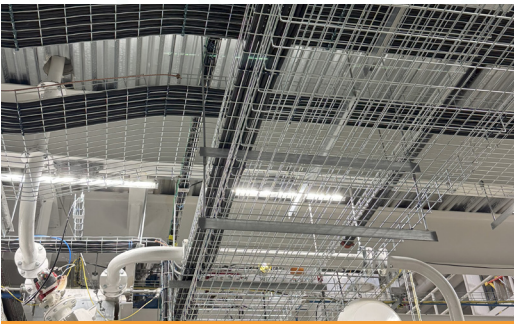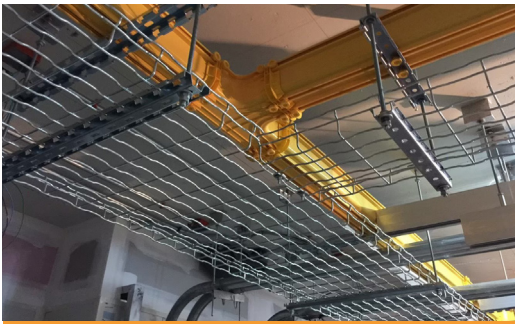

BasorFIL

BF2R


L > 100m
IEC 61537
NEC 392


150°C -50°C
IEC 61537


3 8+
9C
IEC 61537


OK

RoHS
OK


IECEE CB
ES2376-AENOR


CERTIFIED
SAFETY US CA
E358301

PRODUCTO CERTIFICADO

CERTIFIED PRODUCT




BasorFil BF2R product family is a versatile and reliable solution for a wide range of cable management needs.

It is especially suited for environments with evolving voice, data, and video systems, such as data centers, telecom rooms, commercial spaces, and backbone networks.

Its flexible design allows for quick on-site modifications—turns, tees, rises, and drops can all be easily configured to adapt to the specific requirements of each project.

Ideal for managing UTP, fiber optics, video, alarm, and power cables, this solution ensures efficient routing and optimal organization wherever cables are needed.

EASY 2 STEPS INSTALLATION

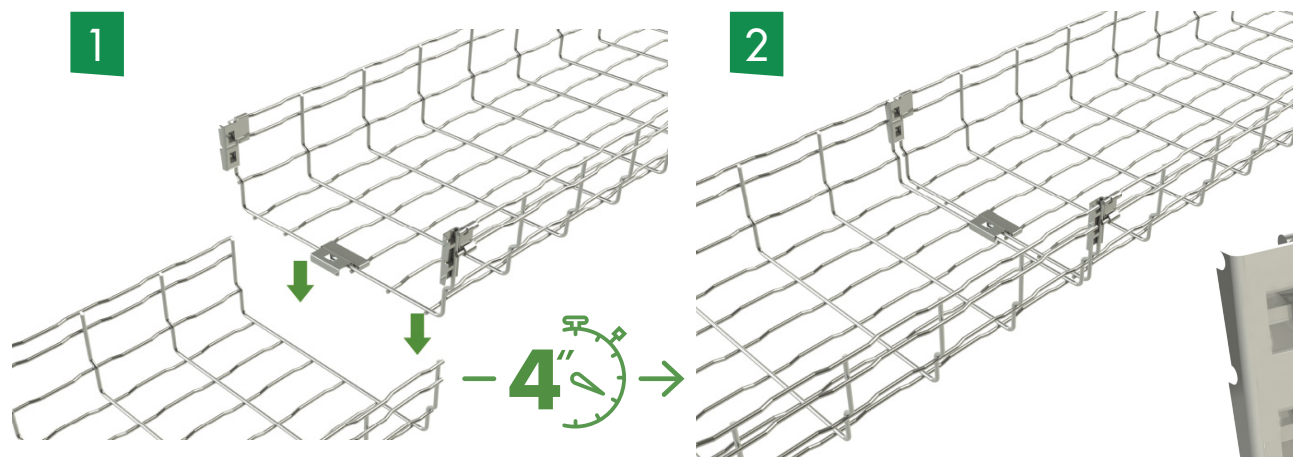


STANDARD
100%


BF2R
178%

SAVING TIME
SAVING MONEY

3E Basor
CABLE TRAY SPECIALIST

